

EMAK



Technical Specifications

Compliance	:	Machine Directive 2006/42/EC.
Type of Lift	:	Through Floor Lift.
Power Supply	:	1 Phase 1/N/PE 230 /240 VAC INVERTER
Environmental Conditons	:	Indoor Only.
Drive System / Control	:	Hydraulic Direct 1:1 Drive / PLC.
Rated Load	:	150 kg - Standing 1 Person.
Rated Speed	:	Max. Speed 0,15 m/s.
Travel Height	:	Up to 3000 mm.
Number of Stops	:	2 Stops.
Cabin Button Operation	:	Push and Hold.
Hall Call Operation	:	Push and Go via Remote Control.
Cabin Door Configuration	:	8 mm Glass Manual Swing Door. Hinged left or right.
Cabin Entrance Step Rise	:	88 mm
Landing Door	:	N/A
Cabin Side Wall (Right & Left)	:	5 mm Plexiglass.
Emergency Lowering	:	Manual lowering on valves.
Power Failure Rescue	:	Automatically operated downwards travel via UPS.
Safety Equipments	:	Integrated rapture valves on cylinder Cabin door and lock switch contact Emergency stop button on cabin operation panel Cabin upperpan Switches + Cabin upperpan finger switches Cabin underpan Switches Upper limit switch Automatic releveling Floor level surveillance Door open buzzer Trapdoor for upperfloor

							
Factory Head Office 61/006, 19, Cankaya, No: 19 06560 Çankaya / ANKARA Türkiye							
info@emaktr.com export@emaktr.com info@emaktr.com info@emaktr.com							
To whom it may concern:							
Name and address of the manufacturer: EMAK TRADING LTD. No: 10 61/006, 19, Cankaya, No: 19 06560 Çankaya / ANKARA Türkiye							
Model Type	Rated Speed						
Product Serial Number	Rated Load						
Name of manufacturer	Description of the goods						
The product described above is in conformity with the following directives: Machinery Directive 2006/42/EC CE							
The declaration of conformity is based on the sole responsibility of the manufacturer for the company below:							
<table border="1"> <tr> <td colspan="2">Name and address of the Importer company :</td> </tr> <tr> <td colspan="2">Invoice Number:</td> </tr> <tr> <td colspan="2">Invoice Date:</td> </tr> </table>		Name and address of the Importer company :		Invoice Number:		Invoice Date:	
Name and address of the Importer company :							
Invoice Number:							
Invoice Date:							

More than 3000mm travel height please contact sale department. export@emakelevator.com

Space Efficiency

Occupying less space, footprint - covers just 0.8m² ideal for efficient use of limited areas. Compact Design and Architectural Flexibility.

Cost Effectiveness

Often more economical to install and maintain. They are a practical choice for budget conscious projects.

Safety and Reliable

Emak Mini are equipped with safety features to ensure passenger security, including emergency stop button and switches to detect obstructions.

Shaftless Through Floor Lift



Standard Features

15.6" IPS Touch Screen


Emergency Stop Button

Push and Hold Button




Phone Application for Touch Screen

Now, your family photos won't be forgotten in just the phone gallery. With the Emak Mini screen, you can easily send pictures from your phone to the elevator display using the same Wi-Fi network through the application.

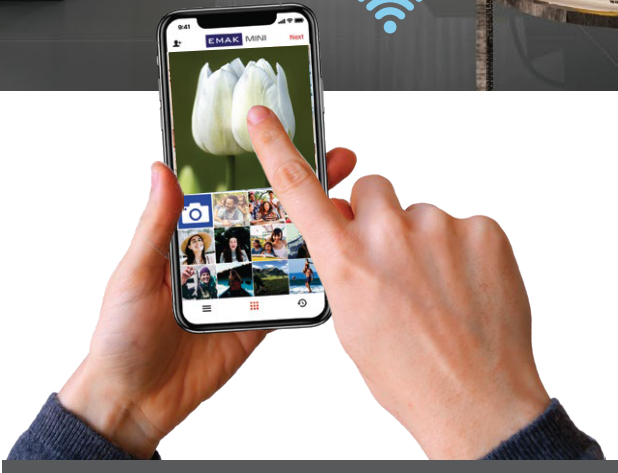

Remote Control

You can easily control your elevator with the remote control feature, allowing you to effortlessly reach the desired floors.

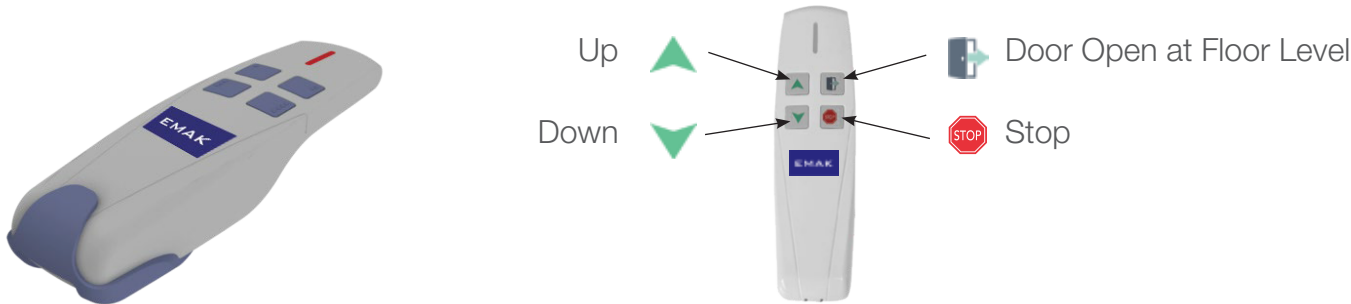

Available Optionals

Elevator designs offer a variety of optional features that can be customized according to users needs and preferences. These options aim to make the elevator experience safer, more comfortable, and personalized. You can add various features to make the elevator experience safe, enjoyable, and practical.




Emergency Calling
GSM Module
(Optional)




Fixed Ramp on
Ground Floor
(Optional)


Cabin Side Walls
8mm Tempered Glass
(Optional)

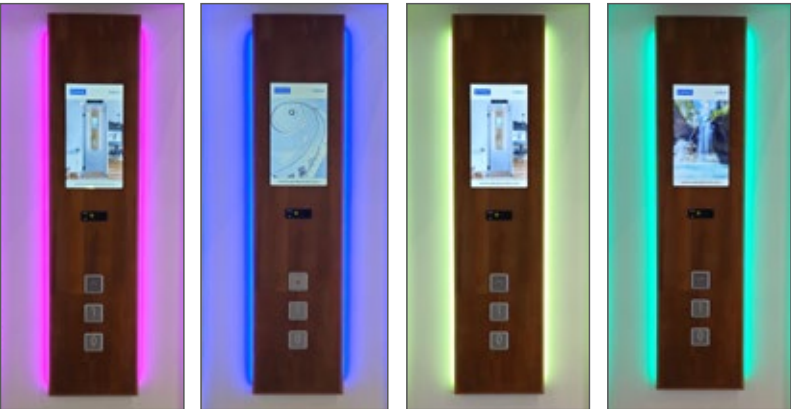

Multicolor LED Lighting
on cabin button
Remote Control
(Optional)

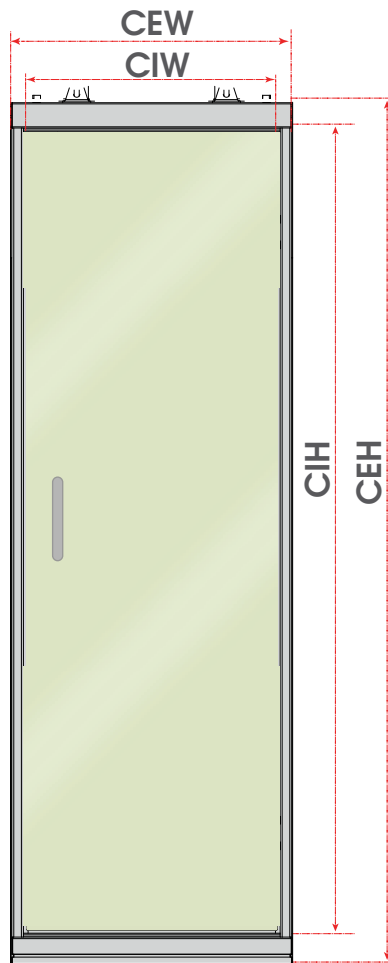


Front view

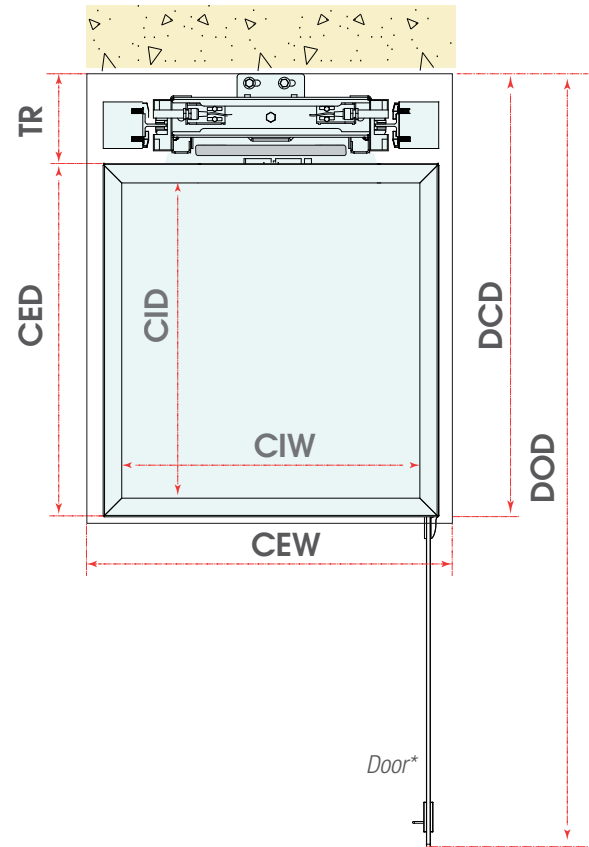

*Left Hinged or Right Hinged


TR	:	Traction	:	190 mm
CIH	:	Cabin Internal Height	:	2000 mm
CEH	:	Cabin External Height	:	2180 mm
CED	:	Cabin External Depth	:	740 mm
CID	:	Cabin Internal Depth	:	675 mm
CEW	:	Cabin External Width	:	740 mm
CIW	:	Cabin Internal Width	:	695 mm
DCD	:	Door Close Depth	:	930 mm
DOD	:	Door Open Depth	:	1595 mm
OH	:	Over Head (Min)	:	2350 mm
TH	:	Travel Height (Min-Max)	:	2200-2999 mm

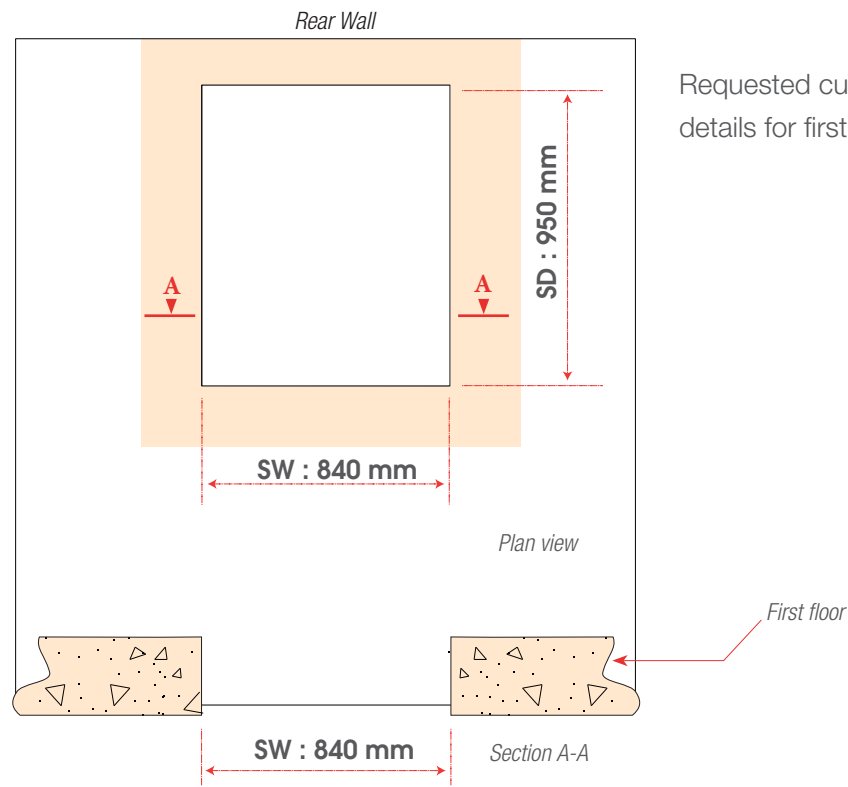


Requested cut-out dimension details for first floor (Aperture)

Hydraulic Power Unit Dimensions

The hydraulic power unit and control panel are housed in a single box. This integration can reduce installation time and make the system more compact. It also simplifies maintenance and servicing.

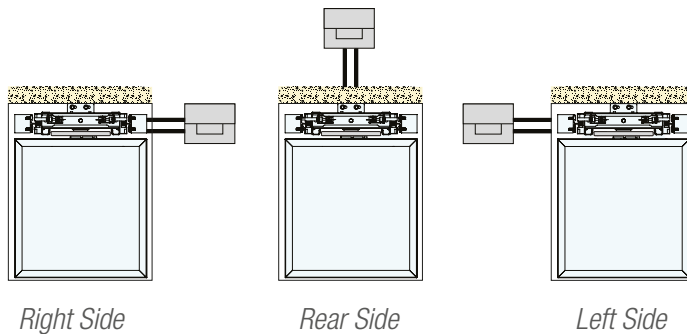

This Power cabinet can be placed on Left, Right or Back side of the system on ground floor only

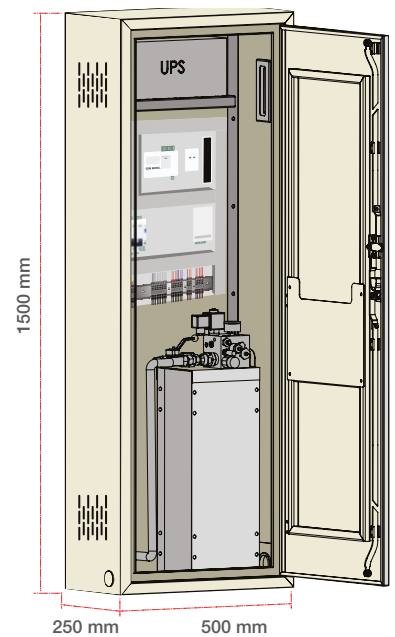

SINCE
1971

EMAK

Factory - Head Office

*M.OSB, 19. Cadde No:33 38150 Melikgazi KAYSERİ / TURKEY
Tel : +90 352 241 36 36
export@emakmini.com info@emakmini.com*

United Kingdom - Office

*Unit C8, Angel Works Road Advent Way, N18 3AH
London, United Kingdom N18 3AH
Tel : +44 7803 623438 uk@emakelevator.com*

www.emakmini.com